

Dust from demolition-construction sites...
That is controllable?
Yes, with a Negative Pressure Machine!

H-600V



- Speed Control Switch : 50-600cfm
- Filter change indicator
- Hepa Filter 99.97%
- Control Panel is modular
- Carrying handle on top
- Mounted on plastic blades to protect surfaces
- Exhaust with an 8'' flexible duct
- Normal operating amps : 1.9 amps
- Total weight : 46 lbs

H-1000V



- Speed Control Switch: 50-900 cfm
- Filter change indicator
- Hepa Filter 99.97%
- Control Panel is modular
- Cabinet material : galvanized steel, with gasket
- Cabinet construction : riveted
- Exhaust with a 12'' flexible duct
- Total Weight : 79 lbs
- 31 3/8 '' x 17 3/4'' x 24 1/2''



1055, Taschereau Blvd suite 200, La Prairie,
Qc, Canada, J5R 1W9
Tel.: (450) 444-8012
Fax : (450) 659-8852
Toll Free : 1-877-444-8012
Email : qualitair@videotron.ca
Web Site : www.qualitair.ca

H-600V


Replacement filter

The H-600V use 3 filters in sequence :

Pre-filter : PSQD

Intermediary filter : Perfect-Pleat Ultra

Hepa Filter cylindrical

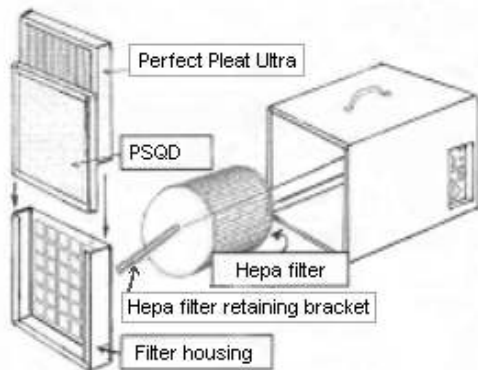

H-1000V

Replacement filter

The H-1000V use 3 filters in sequence:

Pre-filter inside door : PSQ

Intermediary filter inside door : Perfect-Pleat Ultra

Hepa Filter : 15x18x11.5

Front view



Control panel

